

# OPERATION MANUAL



**NOTE:** Tasmota is not a commercial product and support is limited. You must be willing to independently investigate and resolve potential issues.

Detailed information about connecting, changing settings and modifications is presented on the website " <https://tasmota.github.io/docs/> "

## description

The NOUS A6T smart Wi-Fi socket with Tasmota open software installed (hereinafter referred to as the smart socket) is designed to organize automatic and manual shutdown of electrical appliances on the street, through remote access via a Wi-Fi network, using a smartphone or from a personal computer via the Web interface. Communication with the smart outlet is configured via a Wi-Fi network, for which a wireless Wi-Fi adapter is used. The smart socket is equipped with a mechanical button and a global indication of the device's status. The smart socket is equipped with an electromechanical relay and supports the **Matter** protocol . The device has an energy monitoring function and a temperature sensor.



**ATTENTION:** The connection of a smart socket with a Wi-Fi network cannot be guaranteed in all cases, as it depends on many conditions: the quality of the communication channel and intermediate network equipment, the brand and model of the mobile device, the version of the operating system, etc.

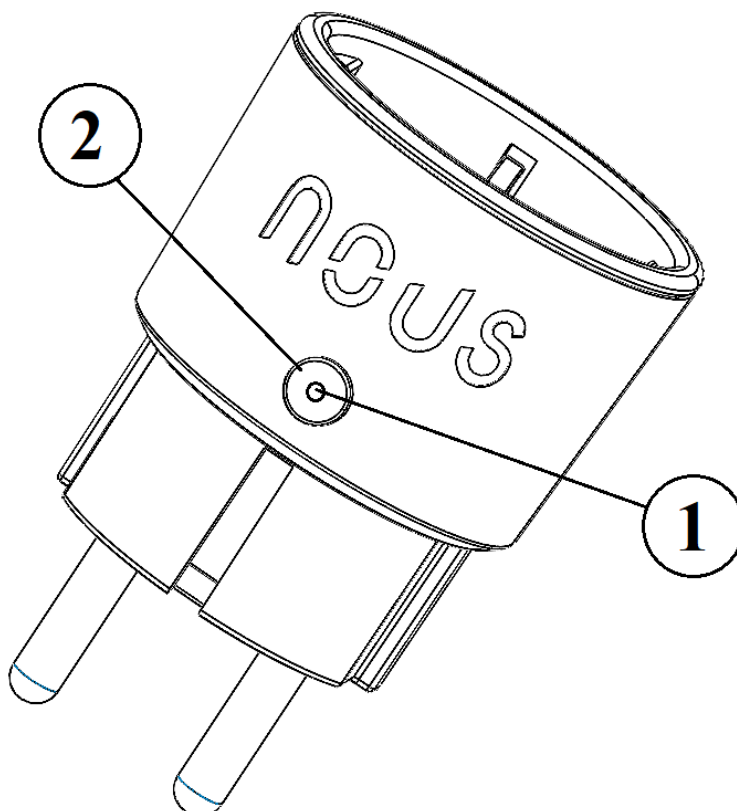
## PRECAUTIONARY MEASURES

- Read this manual carefully.
- Use the product within the temperature and humidity limits specified in the technical data sheet.
- Do not install the product near heat sources such as radiators, etc.
- Do not allow the device to fall and be subject to mechanical loads.
- Do not use chemically active and abrasive detergents to clean the product. Use a damp flannel cloth for this.
- Do not overload the specified capacity. This may cause short circuit and electric shock.
- Do not disassemble the product yourself - diagnostics and repair of the device must

be carried out only in a certified service center.

- Please contact the seller for a replacement if there is damage caused by shipping.
- Please insert the plug into the outlet in proper condition and away from children.
- For safety reasons, insert the plug fully into the outlet when in use.

## Design and controls



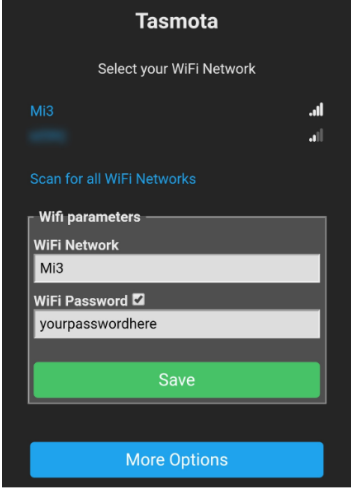

N <sub>e</sub>	Name	description
1	Indicator	Shows the current state of the device
2	Button	A short press of the button switches the device "ON" "OFF".

## Connection

A smartphone or personal PC is required to connect the Nous A8T smart socket.

## The procedure for connecting a smart socket to

## a Wi-Fi network:


1	Make sure that the frequency range of the network to which the device will be connected is 2.4 GHz, otherwise the smart socket will not connect, since the smart socket is not designed to work with 5 GHz Wi-Fi networks;
2	Turn on the smart socket to the network. On the PC, the access point "tasmota-xxxxxxx" should appear in the list of networks, if the access point is not detected, you need to perform a "RESET" according to point 11
3	Connect to hotspot "tasmota-xxxxxxx"
4	After connecting to the access point, the browser will automatically open and go to the link 192.168.4.1, if this operation was not followed, then you need to open the browser and enter 192.168.4.1 in the address input field
5	On the open page, you need to select your access point and enter its password in the field below and click "Save"
	
6	When the connection is complete, the inscription "Successfully connected to Wi-Fi" and the address of your device on the network will appear
7	Connect to your Wi-Fi network and go to the address that was specified in point 6
8	You will need to calibrate the device for the power source. You can find how to do it here: <a href="https://tasmota.github.io/docs/Power-Monitoring-Calibration/">https://tasmota.github.io/docs/Power-Monitoring-Calibration/</a>
9	The smart socket is ready for use. The template and rules are already activated, but if you need it later, you can find it below

**NOUS A8T**  
**Tasmota**

Voltage	0	V
Current	0.000	A
Active Power	0	W
Apparent Power	0	VA
Reactive Power	0	VAR
Power Factor	0.00	
Energy Today	0.000	kWh
Energy Yesterday	0.000	kWh
Energy Total	0.000	kWh

Matter: No active association  
**Commissioning open for 9 min**

Manual pairing code:  
3003-822-6686



MT:Y:K90C0R15JRL304Z00

ESP32 Temperature 75.6 °C

**OFF**

Toggle

Configuration

Information

Firmware Upgrade

Consoles

Restart

**NOUS A8T**  
**Tasmota**

Template parameters

Name NOUS A8T

Based on ESP32-DevKit (1)

GPIO0	User	
GPIO1	User	
GPIO2	Led_j	1
GPIO3	User	
GPIO4	Button	1
GPIO5	User	
GPIO6	None	
GPIO7	None	
GPIO8	None	
GPIO9	User	
GPIO10	User	
GPIO11	None	
GPIO12	User	
GPIO13	Relay	1
GPIO14	HLWBL_SEL_j	
GPIO15	User	
GPIO16	User	
GPIO17	User	
GPIO18	User	
GPIO19	User	
GPIO20	None	
GPIO21	User	
GPIO22	User	
GPIO23	User	
GPIO24	None	
GPIO25	User	
GPIO26	HLWBL CF1	
GPIO27	BL0937 CF	
GPIO32	User	
GPIO33	User	

```
{"NAME":"NOUS A6T","GPIO":[1,1,576,1,32,1,1,1,1,224,2624,1,1,1,1,1,0,1,1,1,0,1,2656,2720,0,0,0,0,1,1,1,1,1,0,0,1],"FLAG":0,"BASE":1}
```

for further configuration, it is necessary to enter the following commands in the console of the device:  
SetOption21 1  
SetOption146 0

The template must be entered in the "Template" field, check the "Activate" box and save the changes:

**Tasmota**

Other parameters

Template  
{"NAME":"NOUS","GPIO":[32,0,0,0,2]

Activate

Web Admin Password

HTTP API enable  
 MQTT enable

Device Name (Tasmota)  
Tasmota

Friendly Name 1 (Tasmota)  
Tasmota

Emulation  
 None  
 Belkin WeMo single device  
 Hue Bridge multi device

Save

Configuration

10

11

To reset the smart socket to factory settings, you need:  
Plug and unplug the device 6 times and leave it on for the 7th - the LED should start flashing, this means the outlet is ready to be plugged in again;

12

To connect the device to smart home systems using the **Matter** protocol, read the following information:  
<https://tasmota.github.io/docs/Matter/>

Tasmota is a highly extensible and flexible application that can be integrated with:  
Alexa, AWS IoT, Domoticz, Home Assistant, Homebridge, HomeSeer, IP Symcon, KNX, NodeRed, nymea, OctoPrint, openHAB, Otto, IOBroker, Mozilla WebThings Adapter, SmartThings, Tasmohab, Homematic ip  
toUO.  
for more information see here: <https://tasmota.github.io/docs/Integrations/>