

OPERATION MANUAL



NOTE: Tasmota is not a commercial product and support is limited. You must be willing to independently investigate and resolve potential issues.

Detailed information about connection, changing settings and modifications is presented on the website " <https://tasmota.github.io/docs/> "

description

The NOUS A1T smart Wi-Fi socket with Tasmota open software installed (hereinafter - the smart socket) is designed to organize automatic and manual shutdown of electrical appliances in the room, through remote access via a Wi-Fi network, using a smartphone or from a personal computer via the Web interface. Communication with the smart outlet is configured via a Wi-Fi network, for which a wireless Wi-Fi adapter is used. The smart socket is equipped with a mechanical button and a global indication of the device's status. The smart outlet is equipped with an electromechanical relay with a throughput of **16A** . The device has the function of energy monitoring and recording of consumer electricity.



ATTENTION: The connection of a smart socket with a Wi-Fi network cannot be guaranteed in all cases, as it depends on many conditions: the quality of the communication channel and intermediate network equipment, the brand and model of the mobile device, the version of the operating system, etc.


PRECAUTIONS

- Read this manual carefully.
- Use the product within the temperature and humidity limits specified in the technical data sheet.
- Do not install the product near heat sources such as radiators, etc.
- Do not allow the device to fall and be subject to mechanical loads.
- Do not use chemically active and abrasive detergents to clean the product. Use a damp flannel cloth for this.
- Do not overload the specified capacity. This may cause short circuit and electric shock.
- Do not disassemble the product yourself - diagnostics and repair of the device must

be carried out only in a certified service center.

- Please contact the seller for a replacement if there is damage caused by shipping.
- Please insert the plug into the outlet in proper condition and away from children.
- For safety reasons, insert the plug fully into the outlet when in use.

Design and controls

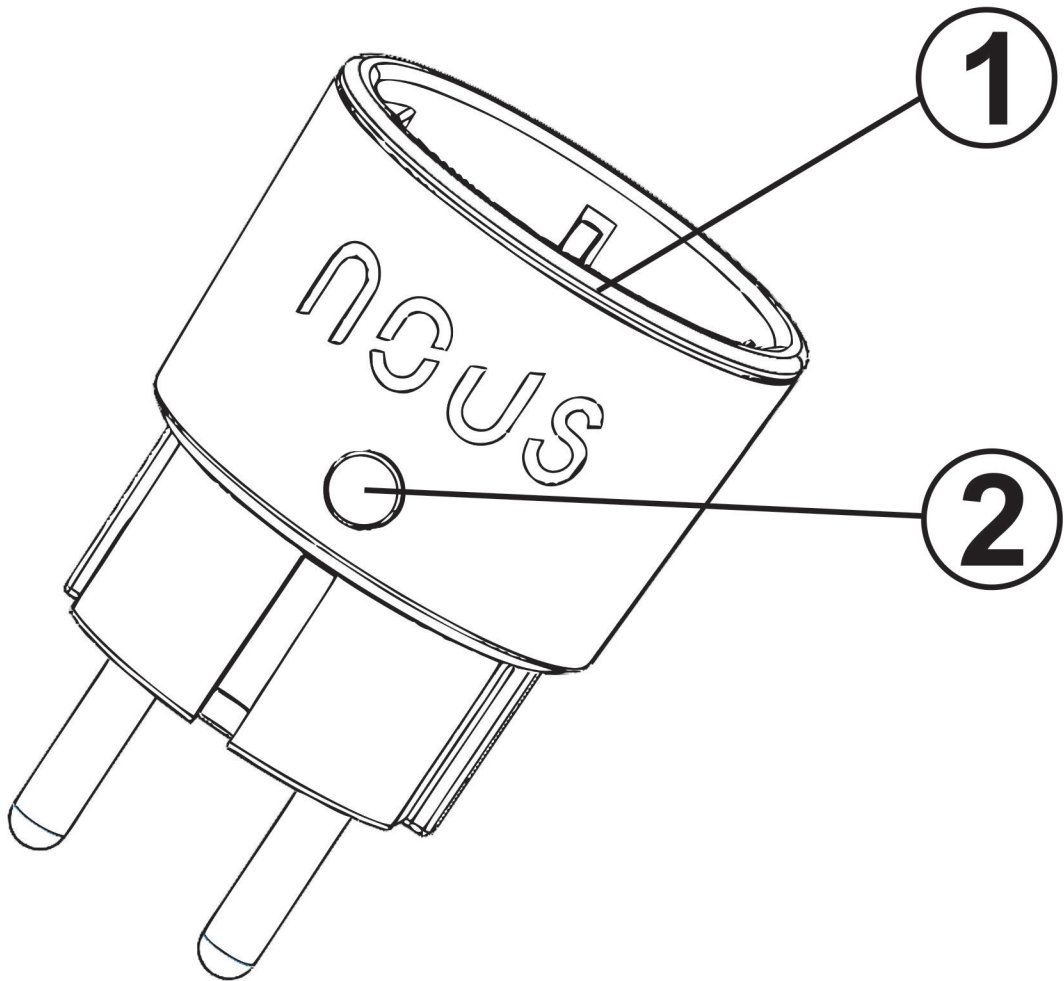



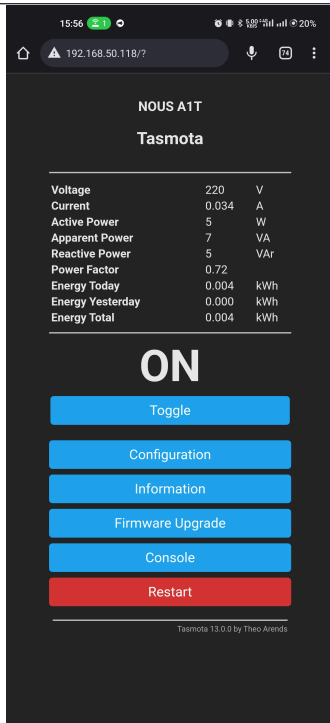
No.	Name	description
1	Indicator	Shows the current state of the device
2	Button	A short press of the button switches the device "ON" "OFF".

Connection

A smartphone or personal PC is required to connect the Nouis A1T smart socket.

The procedure for connecting a smart socket to a Wi-Fi network:

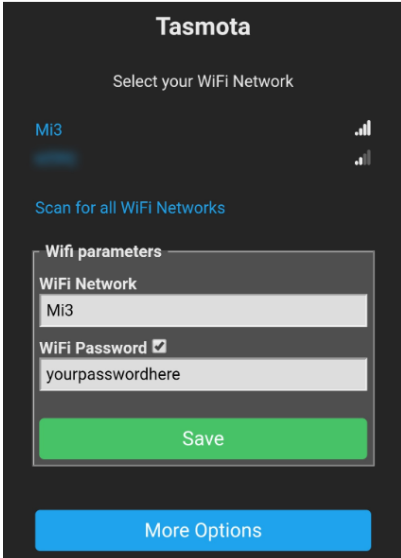
1	Make sure that the frequency range of the network to which the device will be connected is 2.4 GHz, otherwise the Smart WiFi Socket will not connect, since the smart socket is not designed to work with 5 GHz Wi-Fi networks;
2	Turn on the smart socket to the network. On the PC, the access point "tasmota-xxxxxxx" should appear in the list of networks, if the access point is not detected, you need to perform a "RESET" according to point 11
3	Connect to hotspot "tasmota-xxxxxxx"
4	After connecting to the access point, the browser will automatically open and go to the link 192.168.4.1, if this operation was not followed, then you need to open the browser and enter 192.168.4.1 in the address input field
5	On the open page, you need to select your access point and enter its password in the field below and click "Save"
	
6	When the connection is complete, the inscription "Successfully connected to Wi-Fi" and the address of your device on the network will appear
7	Connect to your Wi-Fi network and go to the address that was specified in point 6
8	You will need to calibrate the device for the power source. You can find how to do it here: https://tasmota.github.io/docs/Power-Monitoring-Calibration/
9	The smart socket is ready for use. The template and rules are already activated, but if you need it later, you can find it below



GPIO #	Component
GPIO00	Button 1
GPIO01	None
GPIO02	None
GPIO03	None
GPIO04	BL0937 CF
GPIO05	HLWBL CF1
GPIO09	None
GPIO10	None
GPIO12	HLWBL SELi
GPIO13	Led1i
GPIO14	Relay1
GPIO15	None
GPIO16	None
FLAG	None

```
{"NAME":"NOUS A1T","GPIO":[17,0,0,0,134,132,0,0,131,56,21,0,0],"FLAG":0,"BASE":49}
```

10

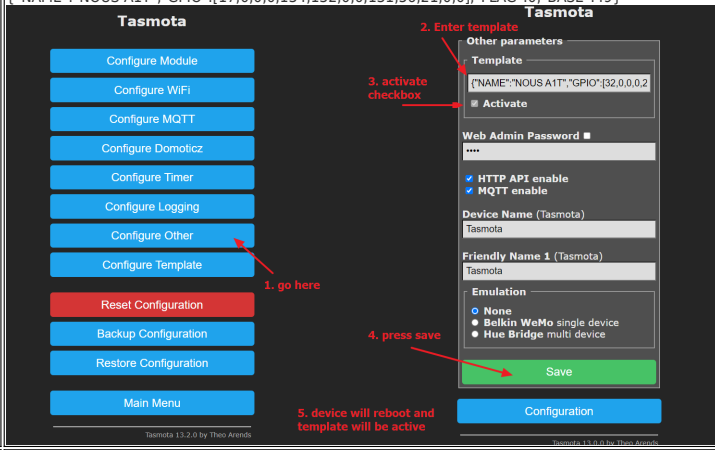

eleven

To reset the smart socket to factory settings, you need:
 Plug and unplug the device 6 times and leave it on for the 7th - the LED should start flashing, this means the socket is ready to be connected again;
 if there is access to the web interface, then type " **reset 1**" in the console and press "enter"

Tasmota is a highly extensible and flexible application that can be integrated with:
 Alexa, AWS IoT, Domoticz, Home Assistant, Homebridge, HomeSeer, IP Symcon, KNX, NodeRed, nymea, OctoPrint, openHAB, Otto, IOBroker, Mozilla WebThings Adapter, SmartThings, Tasmohab, Homematic ip тощо.
 for more information see here: <https://tasmota.github.io/docs/Integrations/>